


**Hydraulically driven water pumps in both closed & long coupled configuration.
Used for dust suppression or bulk fluid transfer systems.**



- 250mm Impellor
- Compact Design
- High pressure hydraulic gear motor
- Piston motor available on request
- Cast iron casting & impellor
- Stainless steel shaft with mechanical shaft seal
- External greasing point
- Two foot mounts to mitigate heavy vibration

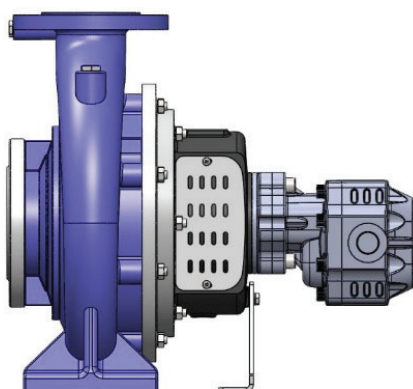

Spare parts	
Jaw Coupling Set	JW38-32-22PDD
Mechanical Seal	MG1/40
Bell Housing Cover	P15577-00SMP
Impellor	IMP 65-250

Code	Flow Rate (L/Sec)	Head Pressure (M)	Inlet	Outlet	Overall Length (mm)	Weight (Kg)
HTCP-65-250	30 L/sec	80m	DN85 PN16	DN65 PN16	816mm	98Kg
HTCP-65-250CC	30 L/sec	80m	DN85 PN16	DN65 PN16	485mm	83Kg

